

LED FLOODLIGHT FL220 / FL240

CHARACTERISTICS

- With IP65 protection class, the LED spotlight is protected against both dust ingress and heavy splashing water.
- The cool white light with 6500 Kelvin allows working at a color temperature that corresponds to sunlight.
- The floodlight is equipped with a standard US plug, so it can be mounted anywhere and easily plugged in.
- Ensure full visibility, even at night, with the LED outdoor floodlight from TOPREGAL.

Type	Unit	FL220	FL240
Width	"	11.89	11.60
Depth	"	12.83	11.02
Height	"	6.61	
Weight	lbs	7.96	3.53
Power cable length	ft	3.28	

Type	Unit	FL220	FL240
LED number		220	240
Power	W	200	
Operating voltage	V	85 - 265	100 - 265
Frequency	Hz	50 - 60	
Average life	h	50 000	

Type	Unit	FL220	FL240
Working temperature	°F	-4 - 149	
Light color	K	6 500	6 000
Color code		Cold white	
Color rendering level	Ra	80	
Luminous flux	Lumen	20 000	
Beam angle	°	75 x 145	90
Light distribution		Symmetrical	


Type	Unit	FL220	FL240
Protection level		IP66	IP65
Impact protection			IK08
Energy efficiency class		A++	




FL220



FL240

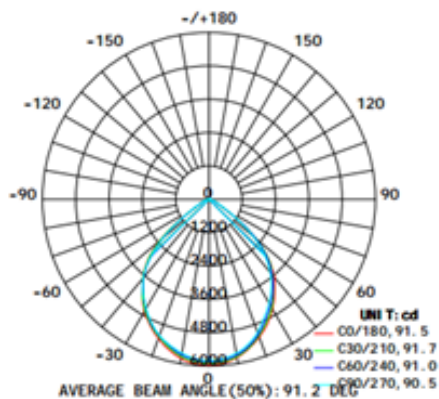

FL220

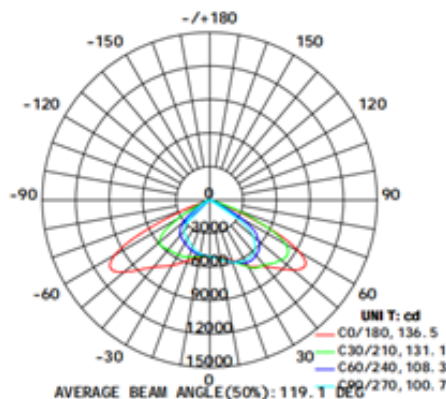

FL240