

LED FLOODLIGHT FL220 / FL240

CHARACTERISTICS

- With IP65 protection class, the LED spotlight is protected against both dust ingress and heavy splashing water.
- The cool white light with 6500 Kelvin allows working at a color temperature that corresponds to sunlight.
- The floodlight is equipped with a standard EU plug, so it can be mounted anywhere and easily plugged in.
- Ensure full visibility, even at night, with the LED outdoor floodlight from TOPREGAL.

Type	Unit	FL220	FL240
Width	mm	302	320
Depth	mm	326	280
Height	mm	168	
Weight	kg	3.61	1.6
Power cable length	m	1	

Type	Unit	FL220	FL240
LED number		220	240
Power	W	200	
Operating voltage	V	85 - 265	100 - 265
Frequency	Hz	50 - 60	
Average life	h	50 000	

Type	Unit	FL220	FL240
Working temperature	°C	-20 - 65	
Light color	K	6 500	6 000
Color code		Cold white	
Color rendering level	Ra	80	
Luminous flux	Lumen	20 000	
Beam angle	°	75 x 145	90
Light distribution		Symmetrical	


Type	Unit	FL220	FL240
Protection level		IP66	IP65
Impact protection		IK08	
Energy efficiency class		A++	




FL220



FL240

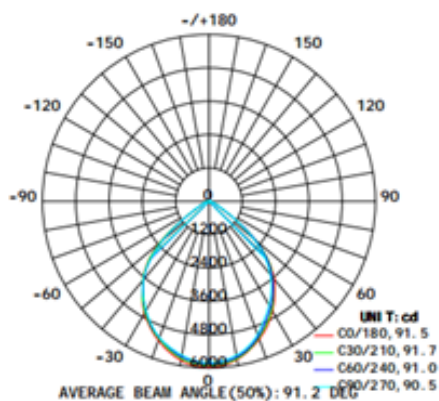

FL220

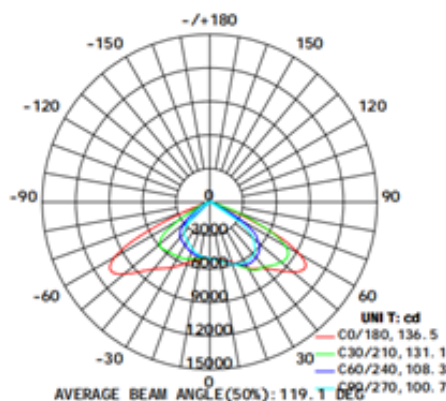

FL240