


SEMI-AUTOMATIC PALLET WRAPPER – PWS1650

CHARACTERISTICS

- Fast, safe and effective pallet wrapping.
- Manual or semi-automatic operation thanks to the individually adjustable program control.
- Sustainable and economic by reducing the amount of film with the pre-stretch system.
- Simple and individual operation with adjustable foot / head winding, speed of turntable (up to 12 rpm) and film carriage.
- Photocell for automatic height scanning of the pallets.

GENERAL

Type	Unit	Value
Brand		TecMaschin
Model		PWS1650
Height	mm	2460
Width	mm	2550
Depth	mm	1650
Own weight	kg	560
Load capacity	kg	2000
Turntable diameter	mm	1650
Turntable height	mm	85
Maximum turntable speed	rpm	12
Frequency	Hz	50
Voltage	V	220
Performance	kW	1.55
Control system		PLC programmable
Operating speed		20 - 40 loads per hour
Minimum dimensions (of the pallet)	mm	500 / 500 / 500
Minimum weight (of the pallet)	kg	150
Maximum pallet size	mm	1900
Size fork openings	mm	133 × 54

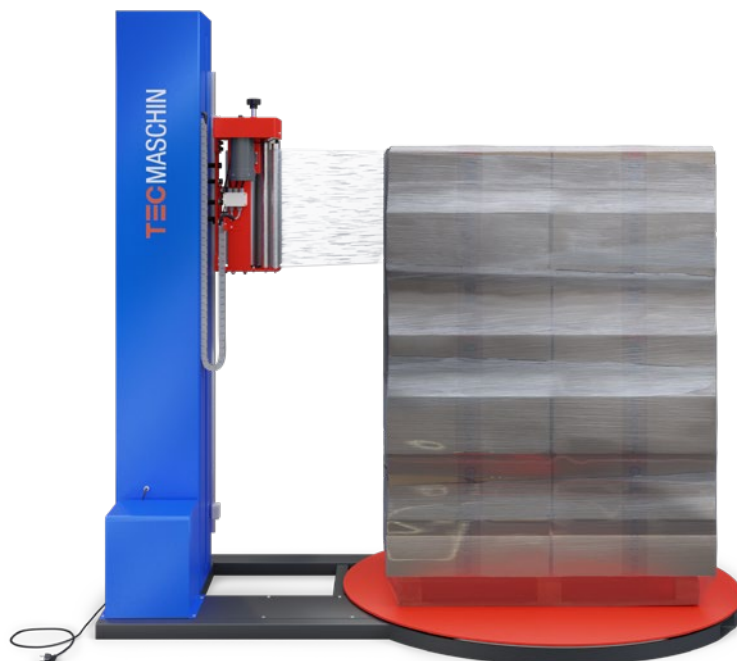

STRETCH FOIL

Type	Unit	Value
Material		LLDPE film (Polyethylene foil low density)
Width	mm	500
Strength	µm	17 - 35
Core diameter	mm	76
Outer diameter	mm	254
Stretch system		Stretch up to 250%

