



## ASSEMBLY INSTRUCTIONS

Forklift Rain Cover

GRS15/25



Please read this manual before using the product and follow the instructions it contains!

## GENERAL

Preface	3
Safety instructions	3
Technical data	3

## ASSEMBLY


Assembly instructions	4
Service & Contact	4

## PREFACE

Congratulations on purchasing your new rain cover for forklift trucks. The GRS15/25 has been manufactured from high-quality materials, specifically for long-lasting and reliable use. For your own safety and to ensure correct operation of the rain cover, please read and observe these operating instructions before use. Keep this operating manual in a safe place. Check the product for transport damage. Damaged rain covers must not be used. The GRS15/25 is designed to protect the driver from the weather. Improper handling may result in injury or damage to the machine. Any liability for damage resulting from the misuse of the rain cover or failure to observe the instructions and rules of conduct in this operating manual is excluded. It is the responsibility of the operator to ensure that the rain cover is used correctly by trained and authorised personnel.

## SAFETY INSTRUCTIONS

- GRS15/25 serves as weather protection for the driver during outdoor use.
- Before each journey, check that all viewing surfaces are clean, free of fogging and undamaged.
- Check the GRS15/25 weather protection for visible damage.
- Stop driving immediately if visibility is impaired by rain, fogging, material reflections or other influences.
- Always adjust your speed to the current visibility and weather conditions.
- Do not use in strong wind, snowfall or icy conditions.
- Replace the weather protection immediately if it is severely damaged to ensure continued safety.
- Please note that the rain cover does not provide additional protection in the event of accidents or falls.
- Please also note that kinks in the material or missing windscreen wipers can impair visibility.

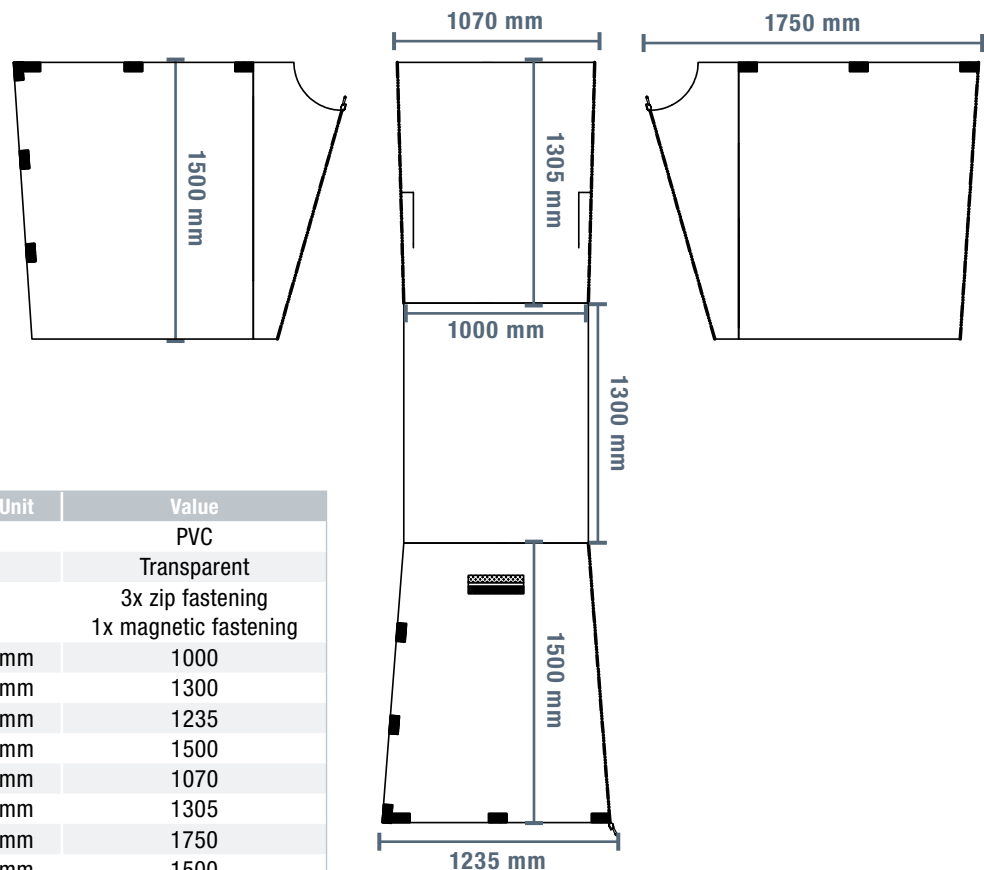


## TECHNICAL DATA

Type	Unit	Value
Material		PVC
Colour		Transparent
Closure		3x zip fastening 1x magnetic fastening
Width (roof)	mm	1000
Length (roof)	mm	1300
Width (back section)	mm	1235
Height (back section)	mm	1500
Width (front)	mm	1070
Height (front)	mm	1305
Width (side section)	mm	1750
Height (side section)	mm	1500
Carrying bag (L x W x H)	mm	400 x 400 x 150

## ASSEMBLY INSTRUCTIONS

1. Open the zips on the sides.
2. Place the cover over the forklift and make sure that all sides and corners are flush.
3. Make sure to position the lights correctly in the openings provided in the cover.
4. Close the zips.
5. The easy-to-open magnetic fastener allows you to access the driver's cab.

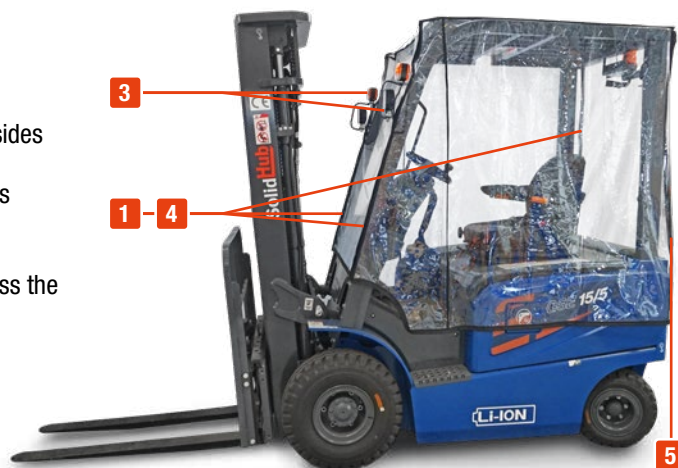


## SERVICE & CONTACT

Contact our product experts and find help and solutions for your product. Here you will find all contact information listed by country and language: [www.topregal.co.uk/en/service](http://www.topregal.co.uk/en/service)

Responsible for the content:  
TOPREGAL GmbH  
Industriestrasse 3  
70794 Filderstadt  
GERMANY  
[www.topregal.com](http://www.topregal.com)

# TOPREGAL


TOPREGAL

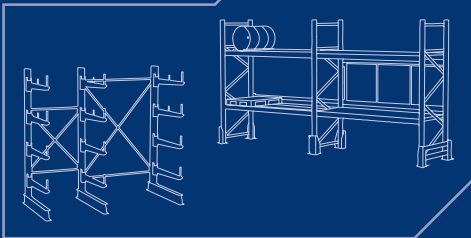

SolidHub



WIPEKET

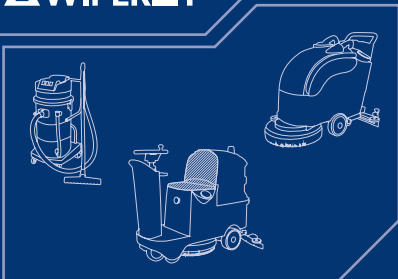

TECMASCHIN



SOLOPORT

